

# Ceres-88 Networked Digital Signage Player

Dynamic marketing displays for multiple locations



## Features

- Support HD video (1080p, 1080i, 720p)
- Support larger LCD screen  
VGA 1920 x 1200, YPbPr 1080P, 1080i
- Multi-zone layouts provide flexibility to combine video, text, and images (7 max)
- H/W Mixer 1366x768 (16:9)
- Embedded web-interface design, no software installation needed


## Specifications

### Software

OS	Embedded Linux
Support Media	HD, DVD-Video, WMV9, JPEG
Video Specification	- MPEG-2 (.mpg), MPEG-2 MP @ (720p/1080i) (.mpg, .vob) - MPEG-4 ASP @ L5 (720p) (.mp4, .avi) - Windows Media Video 9 MP/ML (720p) (.wmv)
Photo Specification	- JPEG
Playback Mode	Local stored media + playlist playback
Connecting Server	SignageNow server
SignageNow	Web application no software installation needed. Upload content, Design template, Setup playlist + schedule
Internet protocol	HTTP protocol; where PC can surf the website.
IP address	DHCP client or fixed IP

### Hardware

CPU	RISC 200MHz
Memory	DDR400 128MB
Flash	16MB
Mixer	1366 x 768
Storage	4GB SSD (Solid State Disk)
Display output	VGA 1920 x 1200, 1920 x 1080, 1280 x 1024, 1024 x 768 YPbPr 1080P, 1080i, 720P
Wireless (option)	802.11 b/g, 64/128-bit WEP Encryption, Detachable antenna
Network Connector	10/100Mb Ethernet (RJ45), VGA, DVI, YPbPr, Ethernet (RJ45), RS-232 X 2, USB x 2, Audio R/L
Power input	+12VDC 0.5A
Dimension	12" x 6.1" x 1.4"

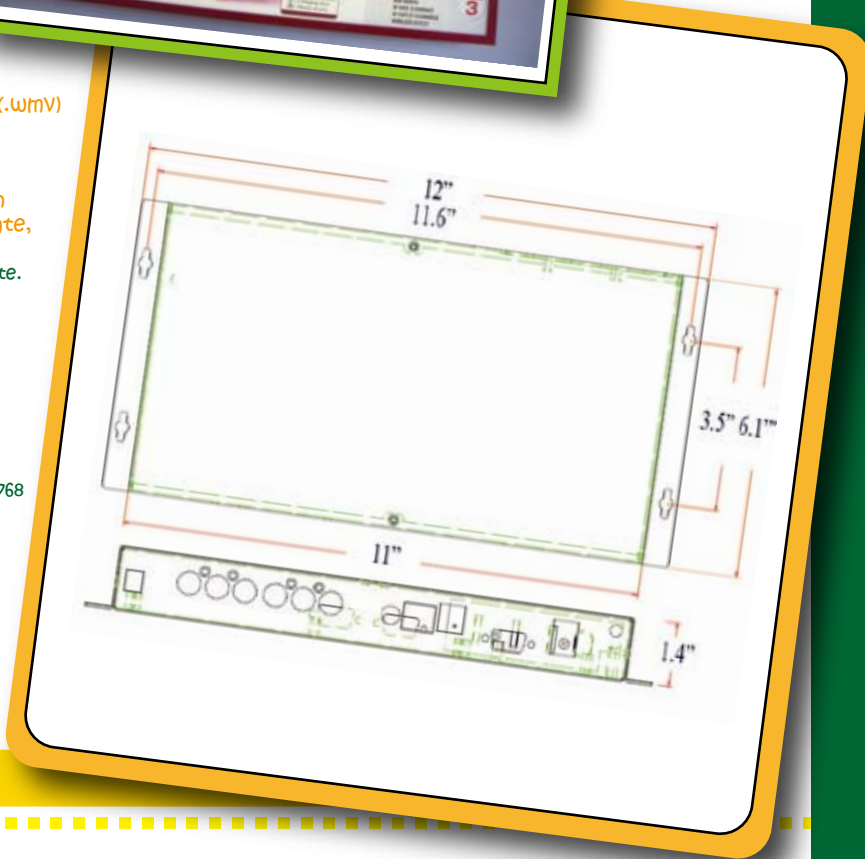

In-Store Marketing Player