

Ceres-200N 20" TFT LCD Networked Digital Signage

Ceres-200N's elegant all-in-one solution is a perfect marketing/entertaining device for store-front, waiting area, or elevator...etc. It's easy-to-install design works with wall-mount, ceiling mount or desktop. Ceres-200N's network function allows you to update new contents to the sign at anytime. It also offers local data storage (CF 1GB) which helps to avoid internet connection failures, at the same time also decreases bandwidth

Features

- Support HD display 1280 x 1024
- SignageNow broadcast media control (over 300 locations)
- SignageNow content schedule control
- Playlist logs available
- Multi-zone display (7 max.)
- User defined template available
- Web interface no software installation needed

Specifications

Video Decoding: - MPEG-1, MPEG-2 MP @ (720p/1080i)
 - MPEG-4 ASP@L5(720p)
 - Windows Media Video(WMV9)
 Main Profile / Medium Level (720p)

Image: - JPEG
 - BMP (4bpp, 7bpp or 24bpp)

Audio Decoding: - Dolby Digital
 - MPEG-1 and MPEG-2 Layers I, II and III(MP3)
 - Windows Media Audio 9(WMA9)

Screen Type: - 20.1" TFT LCD

Screen Resolution: -1280 x 1024

Brightness: -300 cd/m2 (typical)

Lamp Life Time: 40000hr *

Contrast: -700:1 (typical)


Resolution: -VGA 1280 x 1024

Audio Output: -Stereo (L/R) audio output (Earphone)

Network Interface: -1xRJ45 10/100 Ethernet port

Serial Interface: -1xRS232 Male DSUB-9pin (UART1)

Storage: -1xCT 1GB (2GB optional)

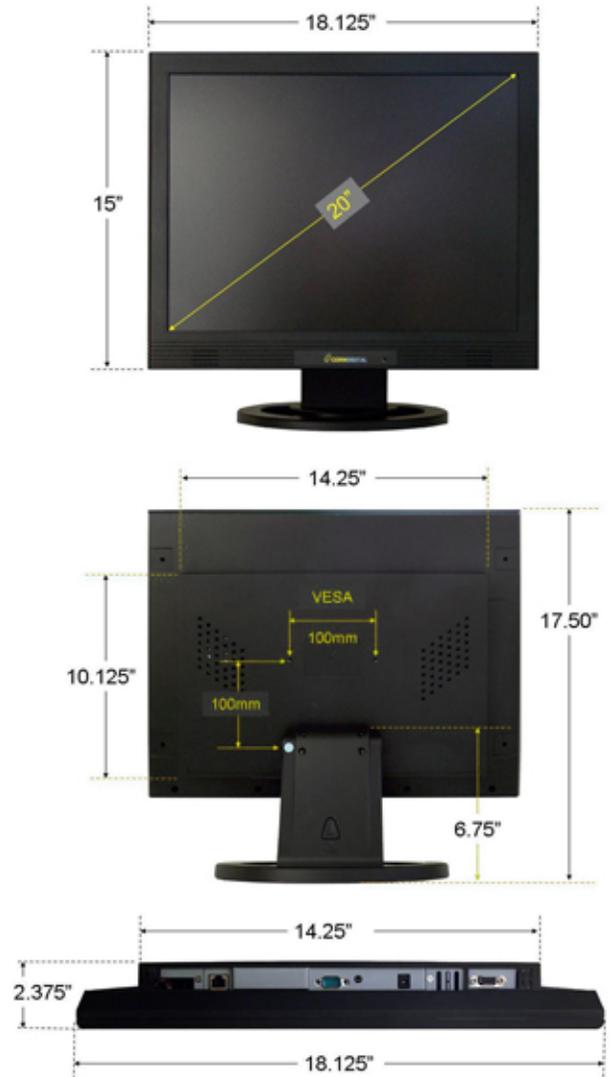

SignageNow

A comprehensive web-based system made easy! No additional software installation is required. Access all your signs from your computer at anytime from anywhere.

* Lamp life definition: The brightness of lamp becomes 50% of the initial brightness