

Ceres-321/421NW

32" / 42" Networked Digital Poster

Dynamic poster signs / menu boards for shopping mall / stores

Sunlight
Readable

Features

- Enhanced brightness and contrast ratio suitable for all lighting conditions (Ceres-421NW)
- High brightness, ultra wide viewing angle panel
- Fan cooling with heavy duty air filter to avoid cooking fume & grease
- Special Portrait Only LCD design to avoid homogeneous color effect (Ceres-421NW)
- Ultra slim design thinner than 4 inches
- Scratch-free & Anti-reflective temp-glass screen protector



Ceres 421

Ceres 321

Anti-Reflective
Glass Protector



Ceres-321/421NW

32" / 42" Networked Digital Poster

Dynamic poster signs / menu boards for shopping mall / stores


Specifications

Software

- OS Embedded Linux
- Support Media HD, DVD-Video, WMV9, JPEG
- Video Specification - MPEG-1 (.mpg), MPEG-2 MP@(720p/1080p)(.mpg, .vob)
 - MPEG-4 ASP @ L5 (720p)(.mp4, .avi)
 - Windows Media Video 9 MP/ML (720p)(.wmv)
- Photo Specification - JPEG
- Playback Mode Local stored media + playlist playback
- Connecting Server SignageNow server
- SignageNow Web application no software installation needed
 - Upload content, Design template, Setup playlist + schedule
- Internet protocol HTTP protocol ; where PC can surf the website
- IP address DHCP client or fixed IP

Hardware

- CPU RISC 200MHz
- Memory DDR400 128MB
- Flash 16MB
- Mixer 1366 x 768
- Storage 4GB SSD (Solid State Disk)
- LCD Panel 42" / 32" TFT LCD Panel resolution 1366 x 768
- Display Resolution VGA 1366 x 768
- Brightness 700 nits - 42", 500nits - 32"
- Viewing angle 178 degrees (H.V)
- Wireless(option) 802.11 b/g , 64/128-bit WEP Encryption, Detachable antenna
- Network 10/100Mb Ethernet (RJ45)
- Speakers 4W x 2
- Connector Ethernet (RJ45), RS-232 (console), Audio R/L
- Chassis material Metal with Anti-Reflective glass screen protector
- Power input AC 100V-240V, 240W
- Dimension 30.13" x 17.92" x 3.73" (Ceres-321NW), 23.23" X 39.25" X 4.17" (Ceres-421NW)

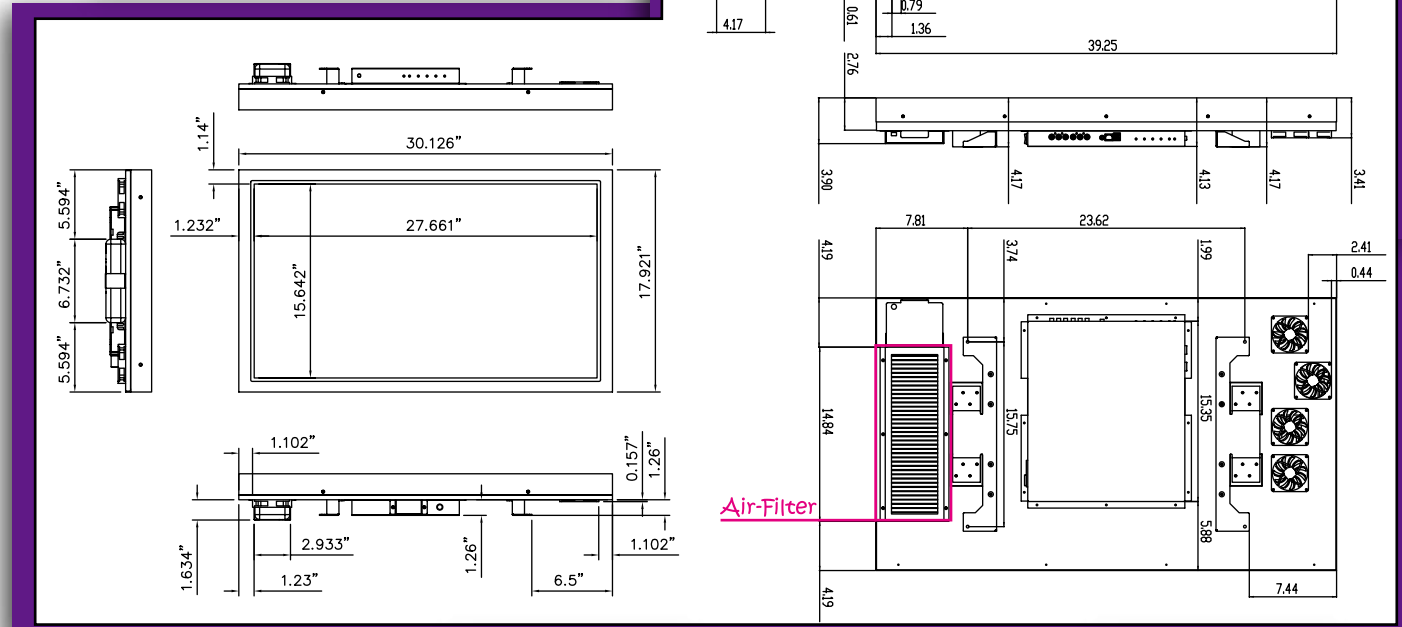

Ceres 321 NW

Ceres 421 NW